



DDR3 & DDR4 SO-DIMM CONNECTOR SERIES

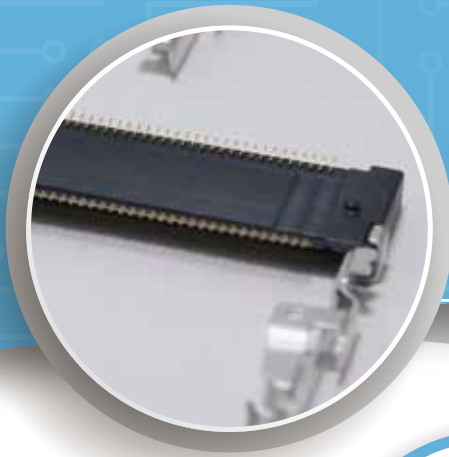

DDR3



DDR4

Features of DDR3 & DDR4 SO-DIMM Connectors

- Meet high speed electrical requirement of JEDEC, EIA & MIL-STD standards
- Excellent mechanical strength, dimensional stability, electrical performance, flame retardant, chemical and heat resistance of LCP Housing
- Reflow process compatible
- Compliance with CE & FCC & MSDS & RoHS requirements
- Capacity 8 million pcs per month
- Customizable specification

Ratings

- Voltage: 25V AC (rms)
- Current: 0.6A (per pin)
- Operation Temperature: -55~+85°C (Humidity range 85% RH max.)

Product	Type	PCB Mounting	PCB Orientation	Height	Pitch	Pin
DDR3 SO-DIMM	Standard / Reverse	SMT	Right angle	4.0/5.2/6.0/8.0/ 9.2/11.0/12.0mm	0.6 mm	204
DDR4 SO-DIMM				4.0/5.2/6.0/ 8.0/9.2mm		

